

OYUNGSOLAR

OSM66NTB

605-630 Watt

HALF CELL

N-Type TOPCon

BIFACIAL WITH DUAL GLASS

N-Type Technology

N-Type modules with Tunnel Oxide Passivating Contacts (TOPcon) technology offer lower LID/LeTID degradation and better low light performance.

HOT 3.0 Technology

N-type modules with HOT 3.0 technology offer better reliability and efficiency.

Dual-Sided Power Generation

Dual-sided power generation gain increases with backside exposure to light, significantly reducing LCOE.

Mechanical Load Enhanced



Certified to withstand: 5400 Pa front side max static test load 2400 Pa rear side max static test load

SMBB Technology

Better light trapping and current collection to improve module power output and reliability.

Anti-PID Guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

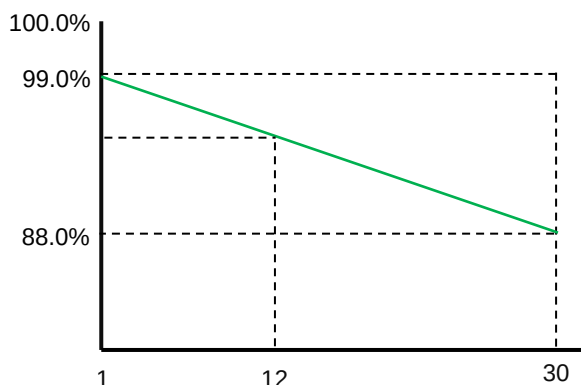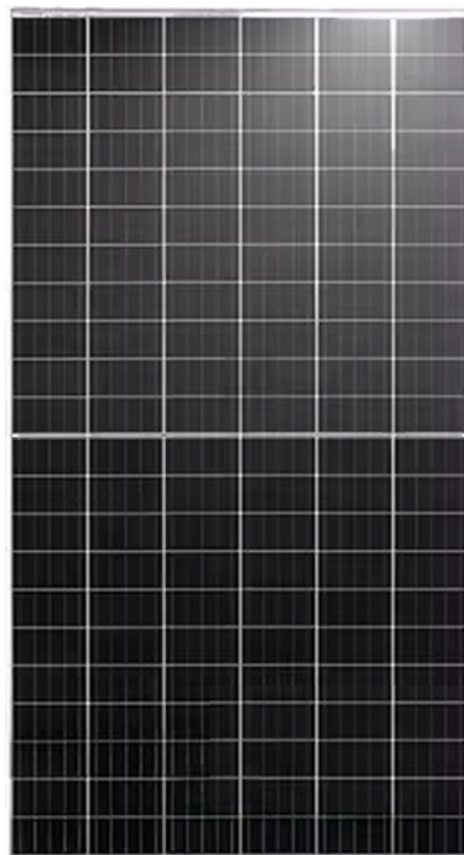

12years
Product
Warranty

30years
Linear Power
Warranty

1.0% **0.40%**
First-year Annual Degradation
Degradation Over 30 Years

IEC61215:2021 / IEC61730:2023
IEC61701 / IEC62716 / IEC60068 / IEC62804
ISO9001:2015: Quality Management System
ISO14001:2015: Environment Management System
ISO45001:2018: Occupational health and safety management systems



OSM66NTB 605-630

OYUNGSOLAR

OYUNG CORPORATION all rights reserved.

www.oyungsolar.com

OSM66NTB 605-630

Mechanical Parameters

Cell Type	N-type TOPCon
No. of cells	132 (66×2)
Dimension	2382×1134×30mm
Weight	32.4kg
Front Glass	2.0 mm, anti-reflection coating
Back Glass	2.0 mm, heat strengthened glass
Frame	anodized aluminium alloy
Junction Box	IP68 rated
Protection Class	Class II
IEC Fire Type	Class C
Output Cables	4.0mm ² , (+): 400mm, (-): 200mm, or customized length

Packaging Configuration

Pallet Dimentions	2396×1140×1251mm
Packaging Detail	36pcs/pallet, 720pcs/40'HC

Specifications (STC)

Maximum Power (Pmax/W)	605	610	615	620	625	630
Maximum Power Voltage (Vmp/V)	40.31	40.46	40.60	40.74	40.88	41.02
Maximum Power Current (Imp/A)	15.01	15.08	15.15	15.22	15.29	15.36
Open-circuit Voltage (Voc/V)	48.48	48.68	48.88	49.08	49.28	49.48
Short-circuit Current (Isc/A)	15.90	15.96	16.02	16.08	16.14	16.20
Module Efficiency (STC/%)	22.40	22.58	22.77	22.95	23.14	23.32
Power Tolerance	0~3%					
Temperature Coefficients of Pmax	-0.29%/°C					
Temperature Coefficients of Voc	-0.25%/°C					
Temperature Coefficients of Isc	0.045%/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)


Maximum Power (Pmax/W)	668	674	679	685	690	696
Maximum Power Voltage (Vmp/V)	40.29	40.46	40.59	40.75	40.88	41.04
Maximum Power Current (Imp/A)	16.58	16.66	16.73	16.81	16.88	16.95
Open-circuit Voltage (Voc/V)	48.46	48.66	48.86	49.06	49.26	49.46
Short-circuit Current (Isc/A)	17.56	17.64	17.70	17.77	17.83	17.90

BNPI: Irradiance: front 1000W/m2, rear 135W/m2, Cell Temperature 25°C, AM=1.5

Application Conditions

Operating Temperature	-40°C ~ +70°C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35A
Nominal Operating Cell Temperature - NOCT	45±2°C
Bifaciality Coefficient	φVoc: 98±5%, φIsc: 80±5%, φPmax: 80±5%

Engineering Drawings

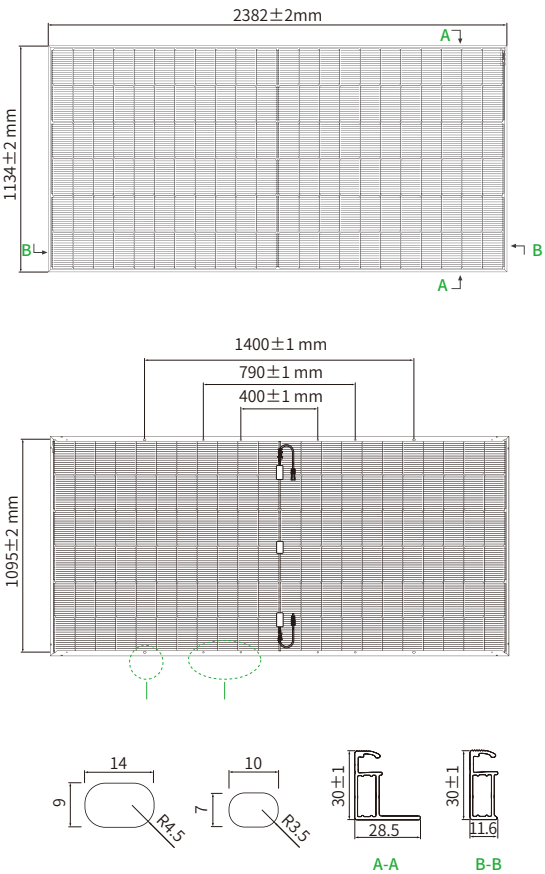

Electrical Performance

